

FM Super Het Receiver 433.92

LOW COST & HIGH SENSITIVITY

RX-FM4SF 433.92

P.N. 650201096G


DESCRIZIONE

Ricevitore supereterodina FM ad elevata sensibilità e selettività, munito di filtro SAW front-end che lo rende altamente immune ai disturbi. Grazie al pin di enable il ricevitore può assumere lo stato di power-down in assenza di segnale e minimizzare così il consumo a 0,5 µA. Ideale per codifica Keeloq di Microchip.

DESCRIPTION

High sensitivity and sensibility super-het receiver FM receiver. Front-end SAW filtered to an higher electromagnetic immunity. Enable pin allows to reach power-down mode without signal and reduce consumption up to 0.5 µA. Ideal for Microchip Keeloq encoders..

BLOCK DIAGRAM

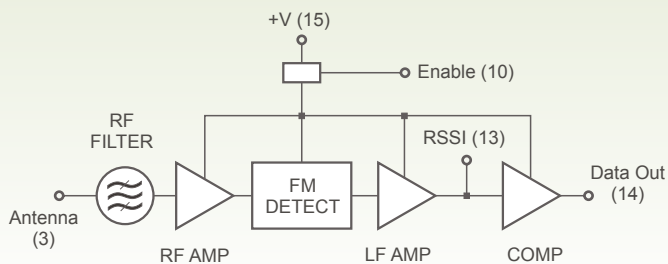


TECHNICAL SPECIFICATION

CHARACTERISTICS	
Supply Voltage	Alimentazione
Supply Current	Corrente Assorbita
Power-down	Power-down
Reception frequency	Frequenza di ricezione
RF sensitivity ⁽¹⁾	Sensibilità RF ⁽¹⁾
RF Bandwidth - 3dB	Banda passante RF a - 3dB
IF Bandwidth - 3dB	Banda passante IF a - 3dB
Square wave output	Onda quadra in uscita
Output high voltage	Livello alto d'uscita
Output low voltage	Livello basso d'uscita
Antenna RF emission	Emissioni RF spurie in antenna
Switch-on time ⁽²⁾	Tempo di accensione ⁽²⁾
Operating temperature range	Temperatura di lavoro


⁽¹⁾ RF generator with 100% modulation

⁽²⁾ Time needed to achieve declared features leaving power-down mode.

DIMENSIONS

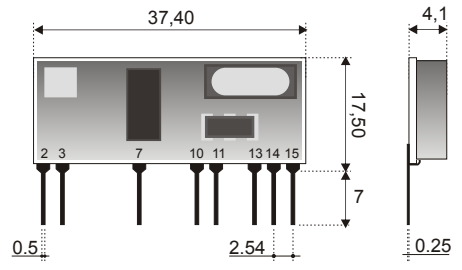

COMPONENT SIDE



PIN-OUT

- 2) Ground
- 3) Antenna
- 7) Ground
- 10) Enable
- 11) Ground
- 13) RSSI Out - Test point
- 14) Data Out
- 15) +V

APPLICATIONS

- Home security
- Access control
- Burglar alarms
- Car alarms

Ta = 25 °C

MIN	TYP	MAX	UNIT
4.5	5	5.5	Vdc
	5.6	6.0	mA
	0.5		µA
	433.92		MHz
	-105	-106	dBm
	600		KHz
	110		KHz
0.5	3.0	3.8	KHz
Vs - 1.2	Vs - 0.8		V
		0.1	V
		- 60	dBm
	1.5	2	mS
-20		+80	°C